


Compact Lockout Stations


Our machine-specific lockout stations are ideal for positioning machine-specific lockout devices, tags and padlocks near the lockout point.

YOU CHOOSE THE PADLOCKS FOR YOUR NEEDS.




Master Lock

Xenoy® Padlocks – Non-conductive, lightweight bodies with permanent write-on labels for worker identification. Key retaining feature ensures that padlocks are not left unlocked. Reserved-for-Safety, high security, 6-pin cylinder offers over 100,000 possible key changes.



AMERICAN LOCK

Anodized Aluminum Padlocks – Heavy duty padlocks feature a durable anodized finish. The 5-pin cylinder offers over 10,000 key changes to minimize risk of key duplication within a facility.



Master Lock

Steel Padlocks – Durable, general security padlocks have reinforced laminated steel construction to withstand physical abuse and a 4-pin cylinder offering up to 1,400 key changes.



Compact Lockout Stations

Compact Lockout Station Holds Machine Specific Lockout Devices and Padlocks Near Lockout Point

- Four hanger clips for safety padlocks or hasps
- Durable construction for years of use in corrosive environments
- Includes face labels in English, Spanish/English or French/English
- Available filled or unfilled
- Measures 9-3/4" tall x 7-3/4" wide x 3-3/8" deep
- Bin measures 6-1/2" wide x 2-7/8" tall x 2-7/8" deep
- Filled centers available with your choice of padlock - Xenoy®, Aluminum or Steel
- Patent Pending



S1700

S1705P410

**Minimal Space
Maximum Storage**



S1720E410
(Hasps available separately)



S1745E410

Master Lock Model #			Unfilled	Description
410RED Xenoy® Padlocks	A1106RED Aluminum Padlocks	3RED Steel Padlocks		
S1705P410	S1705P1106	S1705P3	S1700	Contains: 1 – padlock, 1 – 421 hasp and 2 – tags
S1720E410	S1720E1106	S1720E3	S1700	Contains: 2 – padlocks, 4 – tags, 2 – 491B and 2 – 493B circuit breaker lockouts
S1745E410	S1745E1106	S1745E3	S1700	Contains: 1 – padlock, 1 – 488 plug lockout, and 1 – tag.

*Xenoy® is a registered trademark of General Electric Corporation.

NOTICE

In Accordance with OSHA Standard 1910.147, all equipment, machines and processes shall be locked out prior to servicing.
 Lockout procedures are posted in the operating area and/or by the main energy source of each machine.
 If you have any questions about the lockout procedures, please see your supervisor or the Safety Director.
 This standard will be strictly enforced.

Training & Signs

The Master Lock training video and signs provides effective means to educate and notify employees about OSHA safety requirements.

Lockout / Tagout Video Training Program

Training Package for Employee Safety and OSHA Compliance

- 10 minute video effectively conveys the importance of Lockout/Tagout in the workplace
- Demonstrates the 7 steps to properly apply, and 5 steps to re-energize from, Lockout/Tagout
- Provides instructions for maintaining Lockout/Tagout during shift changes
- Shows how to apply, remove and maintain lockout devices
- Also suitable for employee-refresher training sessions
- Includes video, 10 Lockout/Tagout Procedure Employee Reference Cards, instructor's guide and employee quiz
- Additional Employee Reference Cards also available (499PR)

Brings Lockout/Tagout To Life



499V



499PR

Master Lock Model #	Description
499V	Complete Training Program w/Video Cassette, and 10 Employee Reference Cards (499PR)
499PR	10 Lockout/Tagout Procedure Employee Reference Cards

Lockout Signs

Identify Equipment That Requires Lockout

- Premium high quality fiberglass material.
 - Rigid, durable construction
 - Won't peel or fade
 - Suitable for all environments, including outdoors


Master Lock Model #	Description	Size
464A	CAUTION. LOCK OUT FOR SAFETY	10" x 7"
464B	CAUTION. THIS MACHINE MUST BE LOCKED OUT PRIOR TO SERVICING.	10" x 7"
467A	NOTICE. IN ACCORDANCE WITH OSHA STANDARD 1910.147 ALL EQUIPMENT...	14" x 20"

- Flexible signs adhere to most surfaces
 - Can be left in place permanently or removed as desired

Master Lock Model #	Description	Size
463A	Magnetic. CAUTION. THIS MACHINE MUST BE LOCKED OUT PRIOR TO SERVICING.	3.5" x 5"
463B	Magnetic. DANGER - EQUIPMENT BEING SERVICED DO NOT OPERATE.	3.5" x 5"
469	Vinyl, adhesive. CAUTION - LOCKOUT FOR SAFETY.	3.5" X 5"



464A



464B




463A



463B



469

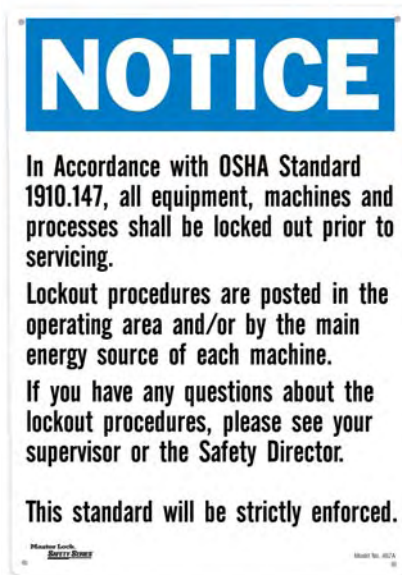

467A